



PCT/IB 04 / 0 2 5 7 6

(3 0 . 0 7 . 0 4)



INVESTOR IN PEOPLE

REC'D 30 JUL 2004	
WIPO	PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


**PRIORITY
DOCUMENT**


SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Dated 4 June 2004

BEST AVAILABLE COPY

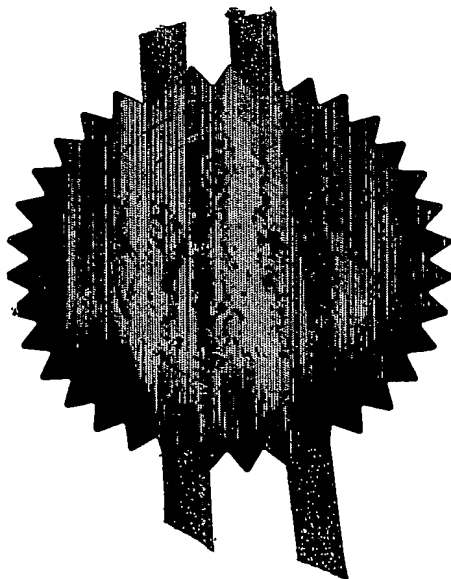



The
Patent
Office

06AUG03 EB28099-1 D03008
P01/7700 0.00-0318386.0

1/77

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1.	Your reference	PHGB 030131GBP		
2.	Patent application number (The Patent Office will fill in this part)	0318386.0		
		- 6 AUG 2003		
3.	Full name, address and postcode of the or of each applicant (<i>underline all surnames</i>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001		
	Patents ADP Number (<i>if you know it</i>)			
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	A METHOD OF PROCESING A SAMPLED SPREAD SPECTRUM SIGNAL STREAM		
5.	Name of your agent (<i>if you have one</i>)			
	"Address for service" in the United Kingdom to which all correspondence should be sent (<i>including the postcode</i>)	Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA		
	Patents ADP number (<i>if you know it</i>)	08359655001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (<i>if you know it</i>) the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (<i>Answer "Yes" if:</i> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	4
Claims(s)	2
Abstract	1
Drawings	1

Handwritten initials and "1 set" next to the continuation sheets table.

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Stamend

Date

05 August 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5339

S TOWNSEND

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DESCRIPTION

**A METHOD OF PROCESSING A SAMPLED
SPREAD SPECTRUM SIGNAL STREAM**

5

This invention relates to a method of processing a sampled signal stream containing at least one spread spectrum signal together with a receiver, computer, computer-readable storage medium and computer program for the same.

10

GPS receivers conventionally have a single analog to digital converter (ADC) for sampling GPS received GPS signals at a fixed resolution. Commonly, such ADCs have a 1-bit resolution but as inadvertent narrowband jamming is particularly common, for example, in an indoor environment from mobile phones, PCs and other electrical equipment, some GPS receivers use ADCs having 1.5 or 2 bit resolutions for improved jamming immunity. It has also been suggested in the literature that multi-bit sampling can mitigate multipath distortion which can be encountered when attempting to measure GPS pseudorange in a urban environment, i.e. when GPS signals take an indirect route to a GPS receiver having been reflected by nearby buildings.

20

As GPS signals experience a high degree of signal attenuation from the GPS satellite to the Earth's surface, the computation burden of acquiring sampled GPS signals at even 1 bit resolution is massive. The computational burden of acquiring such signals at 1.5 and 2 bit resolutions is even higher. Hence, there is a trade off between performance in respect of jamming and multipath and computational cost.

25

In accordance with the present invention, a method of processing a sampled signal stream containing at least one spread spectrum signal is provided together with a receiver, computer, computer-readable storage medium and computer program for the same. The method comprises the steps

30

of processing samples at a first bit level and, either in parallel or subsequently, processing samples at a second bit level, different from the first bit level.

5 The signal stream may be sampled at a higher bit level than at least one of the first or second bit levels wherein the samples are processed at one of either the first or second bit levels by selectively ignoring bits of the signal samples. Alternatively, the signal stream may be sampled at a varying bit level of either first or second bit levels corresponding to the bit level at which those samples will be processed.

10 The samples may be processed in parallel at first and second bit levels for the purposes of acquiring either respective spread spectrum signals or the same spread spectrum signal.

A change from processing the samples at the first bit level to the second bit level may occur upon experiencing difficulty acquiring a spread spectrum signal.

15 If the signal stream contains a GPS spread spectrum signal, the step of processing samples at a first bit level may be used to acquire the GPS signal and the step of processing samples at a second bit level may be used to measure a pseudorange from the GPS signal.

20 The present invention will now be described, by way of example only, with reference to the accompanying schematic drawing showing a GPS receiver in accordance with the present invention.

25 It is well known to provide a GPS receiver in which replica GPS satellite pseudorandom noise (PRN) code signals are continuously generated and correlated with received GPS signals in order to acquire them. Typically, as the replica codes are likely to have a different code phase to those of the received GPS signals and also a different frequency due to Doppler shift between the receiver and orbiting satellites, a two dimensional code frequency / phase
30 sweep is employed whereby such a sweep will eventually result in the incoming PRN code having the same frequency and code phase as that of the

locally generated replica. If detected, the code is acquired and tracked, and the pseudorange information may be retrieved from which the position of the receiver may be calculated using conventional navigation algorithms.

Referring to the accompanying drawing, a GPS receiver is shown in which NAVSTAR GPS SPS signals are received by an antenna 10 and pre-processed in a pre-processor 11 including passive bandpass filtering in order to minimise out-of-band RF interference, preamplification, down converting to an intermediate frequency (IF) and analog to digital conversion. The resultant, digitised IF signal remains modulated, still containing all the information from the available satellites, and is fed into each of twelve parallel receiver channels 12 (not all channels shown). The satellite signals are acquired and tracked in respective digital receiver channels in co-operation with the receiver processor 13 for the purpose of retrieving the 30 second GPS ephemeris data message and measuring pseudoranges from each satellite. Such methods for acquisition and tracking are well known, for example, see chapter 4 (GPS satellite signal characteristics) & chapter 5 (GPS satellite signal acquisition and tracking), Kaplan *ibid*.

Using the GPS pseudoranges, acquired navigation information and the time of arrival of the transmissions, the navigation processor 14 calculates the position of the receiver using conventional algorithms and that position is displayed on a display 15 to the user. The pre-processor 11 will be typically implemented in the form of front end analogue circuitry with the digital receiver channels 12, the receiver processor 13 and the navigation processor 14 implemented in the form of a general purpose microprocessor or a microprocessor embedded in a GPS application specific integrated circuit (ASIC).

In accordance with the present invention, the analog to digital conversion and the acquisition and tracked of the digitised signal in the digital receiver channels may be done as described in either of the following example scenarios:

Example 1

When operating in a urban environment, the GPS receiver uses real-time 1-bit sampling and processing in the digital receiver channels to acquire 3 of the 4 GPS signals necessary to determine a position fix. In order to acquire
5 a 4th GPS signal, the ADC switches to real-time 2-bit sampling and processing in the digital receiver channels. The improved signal acquisition performance enables a 4th GPS signal to be acquired. Thereafter, pseudoranges from the 4 acquired GPS signals are measured to determine a position fix.

10 Example 2

A snapshot of 1s of GPS signal data is sampled at 2-bit quantization (sign and magnitude bits representing -2, -1, 1, 2) and stored. Thereafter, the snapshot is repetitively subjected to 1 bit processing of the sign bit only in the digital receiver to acquired 4 GPS signals. Once the 4 GPS signals are
15 acquired, the snapshot is subjected to 2 bit processing in the digital receiver channels to measure the 4 GPS pseudoranges necessary to determine a position fix.

From a reading of the present disclosure, other modifications will be
20 apparent to the skilled person skilled and may involve other features which are already known in the design, manufacture and use of spread spectrum signal receivers, including GPS receivers, and component parts thereof and which may be used instead of or in addition to features already described herein.

CLAIMS

1. A method of processing a sampled signal stream containing at least one spread spectrum signal comprising the steps of processing samples at a first
5 bit level and, either in parallel or subsequently, processing samples at a second bit level, different from the first bit level.
2. A method according to claim 1 wherein a change from processing the samples at the first bit level to the second bit level occurs upon experiencing
10 difficulty acquiring a spread spectrum signal.
3. A method according to claim 1 wherein the signal stream contains a GPS spread spectrum signal; wherein the step of processing samples at a first bit level is used to acquire the GPS signal; and wherein the step of processing
15 samples at a second bit level is used to measure a pseudorange from the GPS signal.
4. A method according to claim 1 wherein the signal stream is sampled at a higher bit level than at least one of the first or second bit levels; and wherein
20 the samples are processed at one of either the first or second bit levels by selectively ignoring bits of the signal samples.
5. A method according to claim 1 wherein the signal stream is sampled at a varying bit level of either first or second bit levels corresponding to the bit
25 level at which those samples will be processed.
6. A method according to claim 1 wherein the samples are processed in parallel at first and second bit levels for the purposes of acquiring respective spread spectrum signals.

7. A method according to claim 1 wherein the samples are processed in parallel at first and second bit levels for the purposes of acquiring the same spread spectrum signal.
- 5 8. A receiver configured to receive and sample a signal containing at least one spread spectrum signal, and to process that signal by a method according to any of the previous claims.
9. A computer configured to receive a sampled signal containing at least
10 one spread spectrum signal from an external receiver, and to process that signal by a method according to any of claim 1 to 7.
10. A computer-readable storage medium having recorded thereon a computer program comprising instructions for performing a method according
15 to any of claim 1 to 7.
11. A computer program comprising instructions for performing a method according to any of claim 1 to 7.

ABSTRACT


**A METHOD OF PROCESSING A SAMPLED
SPREAD SPECTRUM SIGNAL STREAM**

5

In accordance with the present invention, a method of processing a sampled signal stream containing at least one spread spectrum signal is provided together with a receiver, computer, computer-readable storage medium and computer program for the same. The method comprises the steps
10 of processing samples at a first bit level and, either in parallel or subsequently, processing samples at a second bit level, different from the first bit level.

[Figure 1]

1/1

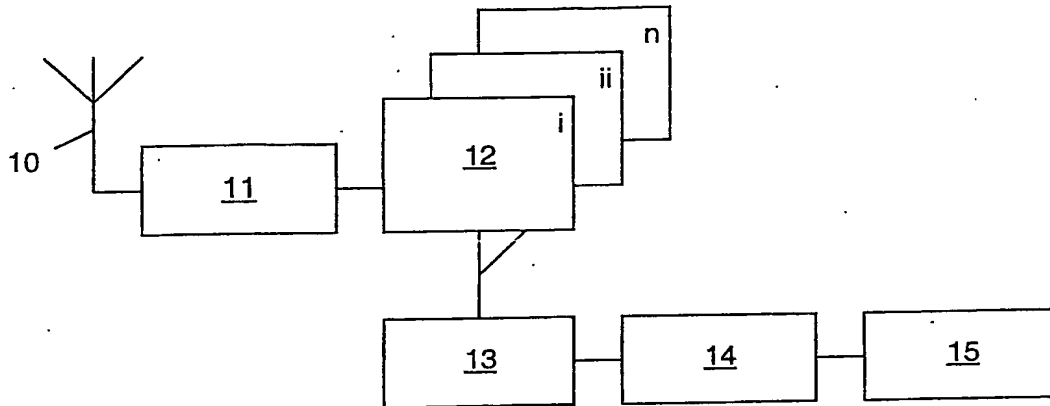

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.